

TMG3215

GNSS disciplined time & frequency generator

The TMG3215 is a GNSS disciplined time & frequency generator specifically designed for low noise applications. The equipment is housed in 1U 19" standard case. GNSS signal is used for long term disciplining of the internal oscillator.

GNSS

The internal GNSS receiver is a specific receiver dedicated to time application. It's a bi-constellation model able to acquire both GPS and GLONASS satellites simultaneously. It delivers a very high precision UTC second reference pulse.

IRIG-B generator

The equipment includes an IRIG B time code generator that allows providing

- An unmodulated signal IRIGB002 (DCLS) on a RS485 serial link.
- An analog modulated IRIGB12X signal

Those signals are in phase with the internal 1PPS equipment itself synchronized on the 1PPS of GNSS reference.

Oscillator

An internal OCXO type oscillator provides a 10 MHz frequency used to maintain time. The stability of this oscillator is better than $\pm 2 \times 10^{-10}$ per day in case of loss of external time sourcing. When disciplined by the GNSS, the long term stability remains better than 5×10^{-11} .

NTP Service

The TMG3210 includes a time service implementing standard NTP protocol (Network Time Protocol) allowing any computer or equipment linked to the network to synchronize. Customer's computers can be synchronized with an accuracy of 1 to 10 ms. NTP client software must be installed on each client for its synchronization with the server.


Remote control

The remote control of the equipment is done via the network, using:

- The SNMP standard protocol (MIB provided)
- A proprietary UDP or TCP protocol
- An internal web server

Configuration

The overall configuration of the unit is stored on a removable SDCARD memory which allows remote software update easily.

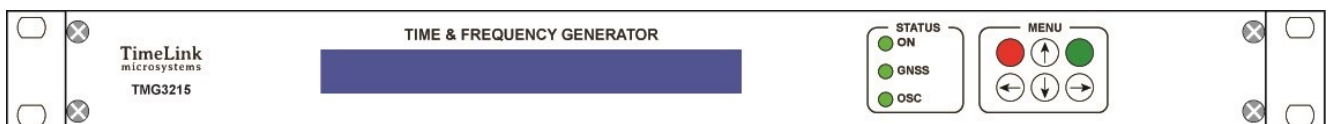

TMG3215 front panel

Specifications

Outputs

1 PPS output

1 output
TTL level

Accuracy of ± 100 ns relative to UTC when locked to GNSS.

IRIGB outputs

IRIG B12x

Modulated code (B12x) : 3V ± 0.5 V peak-peak 1/1: 1/3 ratio isolated by transformer. BNC connectors (analog)

IRIG B00x

No modulated (B00x)
RS422/RS485 interface

NMEA outputs

1 output

RS232 interface 115200 bauds 8 data bits
1 stop bit no parity
Messages GGA RMC VTG & ZDA
Period : 1 Hz

10 MHz Outputs

2 outputs

Level +13 dBm ± 1 dBm, 50 Ω

Guaranteed Phase noise:

1Hz	<-100 dBc/Hz
10Hz	<-130 dBc/Hz
100Hz	<-145 dBc/Hz
1 KHz	<-155 dBc/Hz
10 KHz	<-155 dBc/Hz
100 KHz	<-155 dBc/Hz
1MHz	<-155 dBc/Hz
Spurious:	< -80 dBc
Harmonics:	< -40 dBc

Internal reference

OCXO type Oscillator, 10 MHz

free running mode:

Short term stability:

1s < $2 \cdot 10^{-12}$

10s - 100s < $2 \cdot 10^{-12}$

Long term stability:

1 day < $2 \cdot 10^{-10}$

1 month < $5 \cdot 10^{-9}$

1 year < $3 \cdot 10^{-8}$

locked running mode:

Long term stability: < $5 \cdot 10^{-11}$

GNSS receiver

Time dedicated receiver with TRAIM.
Bi-constellation GPS/GLONASS
 $\leq \pm 50$ ns / UTC

GNSS Antenna type

TNC connector
3V or 5V active antenna
Powered by receiver
(Antenna not included)

Console

RS232 compliant. Console for configuration & maintenance

Connectors:

1 x TNC for the GNSS antenna input
1 x BNC outputs for 1PPS
1 x BNC for IRIGB 12X output
2 x BNC outputs Frequency 10MHz
1x SUB'D 1 x 9-pin female for serial console
1 x 9-pin female SUB'D for output IRIG B002
1x SUB'D 1 x 9-pin female for NMEA output identification "AUX"
1 x RJ45 network connection

Temperature:

Temperature: -10 ° to 60 ° C
Storage temperature: -20 ° to 70 ° C
Relative Humidity range: 10% to 90% (non-condensing)
Storage Relative Humidity: 5% to 95% (non-condensing)

Power supply:

230V AC mains supply:
EEC socket 2P + with filter & On / Off switch voltage: 85-264VAC / 47-440Hz
Power consumption: <20W 230VAC 50Hz

Certification:

Certified CE, ROHS and ITAR Free Network Protocols

NTP

(Network Time Protocol)
NTP (RFC 1305) SNTP (RFC 1361) using UDP 123 port.
Server configuration V3, V4 or automatic V3/V4.

SNMP

(Simple Network Management)
(RFC 1155, 1157, 1213) V2c
SNMP provides to the network administrator the equipment status.

HTTP

The integrated web server allows to view the status of the equipment.

TCP / UDP

Remote in "push" mode (UDP / TCP) or "request / response" mode (TCP).

Dimensions:


Standard 19" 1U with Depth of 350 mm

Weight:

< 3,5 kg

MTBF

> 100 000 h

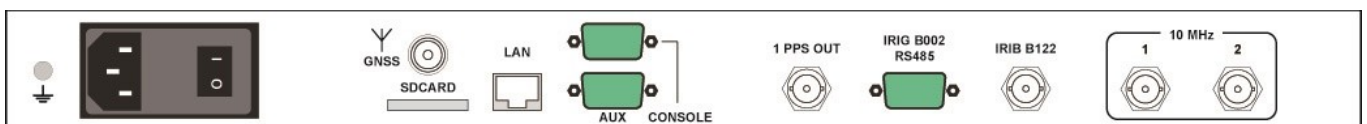

TMG3215 rear panel

Ordering code

TMG3210: Standard model